

Notes:



PUBLIC III

CS60 Wireless Headset System

**Operating and Installation
Instructions**





Clarson Apparatebau GmbH
Zeppelinstr. 4 78083 Dauchingen
Postfach 11 63 78080 Dauchingen
Tel.: +49 7720 9956-0
Fax: +49 7720 9956-22
Email: clarson@clarson.de
Internet: <http://www.clarson.de>

Standard Connection of the CS60 Headset System to the microphone loudspeaker unit PUBLIC III

Central Unit
Ref. 40.054.311

Microphone Loudspeaker Unit
Ref. 40.054.301 - bottom side

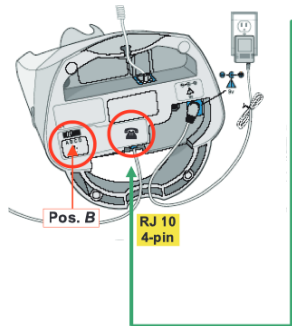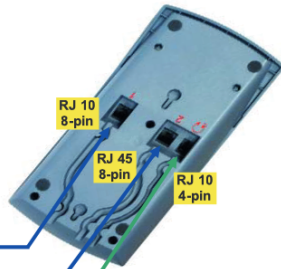

Ref. 40.054.327 patch cable, 3 m
with RJ45 connector (8/8-pin),
central unit ↔ microphone loudspeaker unit

Ref. 40.054.376 patch cable, 3 m
with RJ10 connector (4/4-pin),
microphone loudspeaker unit ↔ CS60 base station




Notes

Blank area for notes.

To log on to one or several headsets at the CS60 Base Station

If one or more headsets are required to operate from one **CS60** base station, they need to be paired as follows:

1. Insert the headset into the base station's charging unit **12**
2. Push and hold the volume buttons + **3** and - **4** of the base station for a min. of 5 sec.
The power supply indicator **16** flashes.
3. Push and hold the headset mute button **22** for a min. of 5 sec.
The online indicator **23** illuminates.
4. Log on has been successful if the power supply indicator **16** illuminates and the online indicator **23** turns off.
5. This procedure has to be executed within 2 min., otherwise the headset returns to the initial state and the procedure needs to be repeated.

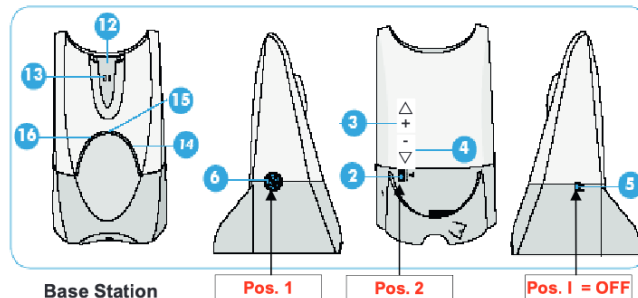

Operating Manual






1. CS60 Base Station settings:


Slide switch **1** (speech volume) to **B**

Configuration dial **6** to **1**


IntelliStand switch **5** to **I**

Slide switch **2** (listen volume) to **2**

2. Connect the **CS60** base station socket  **10** with the headset interface  of the **PUBLIC III** microphone loudspeaker unit, or directly with the **PUBLIC III Headset** socket of the central unit.
3. Connect the power supply unit **7** to the CS60 base station socket **8**.
4. Turn on the **PUBLIC III** microphone loudspeaker unit (button ). Push the **CS60 headset** speech button **20**.
The LED above the microphone loudspeaker unit push button  flashes, the headset is activated.
5. Return to standard operating mode:
- Push the **CS60 headset** speech button **20**.
- Turn the **PUBLIC III** microphone loudspeaker unit push button  off and on again.
6. Please refer for all other functions to the **PUBLIC III** operating and installation instructions and the **CS60** manufacturer's instructions.

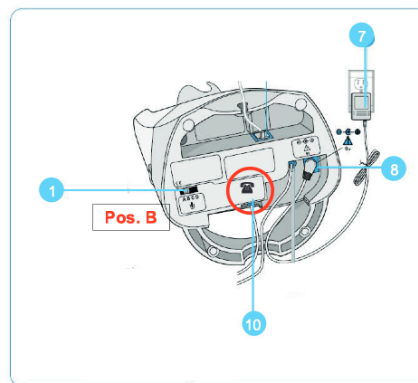

Base Station
- bottom side -

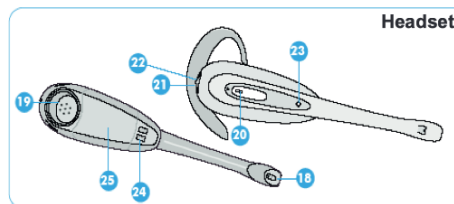

- 1 Slide switch on B (speech volume)
- 2 Slide switch on 2 (listen volume)
- 3 Speech volume +
- 4 Speech volume -
- 5 IntelliStand switch in Pos. I = OFF
- 6 Configuration dial in Pos. 1
- 7 AC power supply unit
- 8 AC power supply port
- 10 Cable port to PUBLIC III central unit
40.054.311 resp. to microphone loudspeaker unit 40.054.301 (page 2)
- 12 Headset charging station
- 13 Base station charge contacts
- 14 Charge indicator
- 15 Talk indicator
- 16 Power supply indicator
- 18 Microphone
- 19 Speaker
- 20 Speech button
- 21 Listen volume adjustments + / -
- 22 Headset mute switch
- 23 Online indicator
- 24 Headset charge contacts
- 25 Battery cover



Headset with base station headband and ear-loop set (3 sizes)

Ref. 40.030.004



Headset with pre-installed battery, headband and ear-loop set (3 sizes)

Ref. 40.030.005



Charging station

Ref. 40.030.006

Replacement battery

Ref. 40.030.008



Headband with leather ear cushion and spare foam cushion

Ref. 40.030.009



Ear-loop set (3 sizes with flexible fixing device)

Ref. 40.030.015



Neckband with fittings

Ref. 40.030.013



Power supply unit


Ref. 40.030.014

Optional Connection of the CS60 Headset-Systems to the Central Unit PUBLIC III


Central Unit
Ref. 40.054.311



Microphone Loudspeaker Unit
Ref. 40.054.301 - bottom side

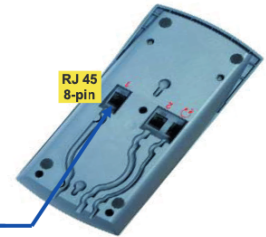

*Ref. 40.054.378 patch cable, 3 m with RJ45/RJ10 connector (8/4-pin), central unit ↔ CS60 base station
Attention: cable must be ordered separately!!!*

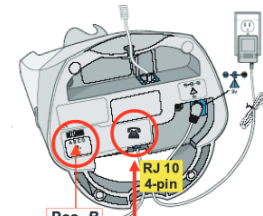

CS60 Base Station
- bottom side -

